


RIV 163

Double-acting hydraulic cylinder, galvanized, Perla / Diamante / Centurion / Vulcano Series

>> Technical Drawings and Plates

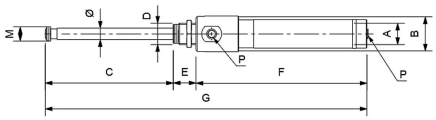

Code	DN	P.O. Box	Diameter	F	B	C	D	E	G	M	P	Weight	d
050163000000	4"- 5"- 6"	1	16	240	50	180	M30x2	32	452	20	1/4"	2,220	M30x2
050163000020	8"	1	16	290	50	246	M35x2	32	569	23	1/4"	3,032	M35x2

>> Advantages

Designed to ensure optimal performance and longevity of RIV roller shutters.

Features an innovative system that automatically reduces closing force to prevent potential damage to the roller shutter guides and applies full force during opening.

With protective external galvanization.

>> Technical Data

Connection	
Limit	0°C (+32°F) without liquid +60°C (+140°F)
	MINIMUM OPERATING PRESSURE:
	4", 5", 6" = 80 bar (1160 psi)
	8" = 120 bar (1740 psi)
Notes	
	MAXIMUM OPERATING PRESSURE:
	170 bar (2465 psi)

>> RIV Rubinetterie Italiane Velatta S.p.A
Via delle Acacie 8 Zona Industriale D4
P. O.Box 64
28075 GRIGNASCO (NO) ITALY
Tel +39 0163 4151

>> Capitale sociale € 516.000 i.v.
Reg. Imprese di Novara N° 00469610026
R.E.A. di Novara N° 170397
Numero Meccanografico NO009263
Codice Fiscale 00469610026
Partita IVA IT 01399720034

>> E - mail riv-vg@riv-vg.com
vendite.italia@riv-vg.com
export.sales@riv-vg.com

Web www.riv-vg.com