
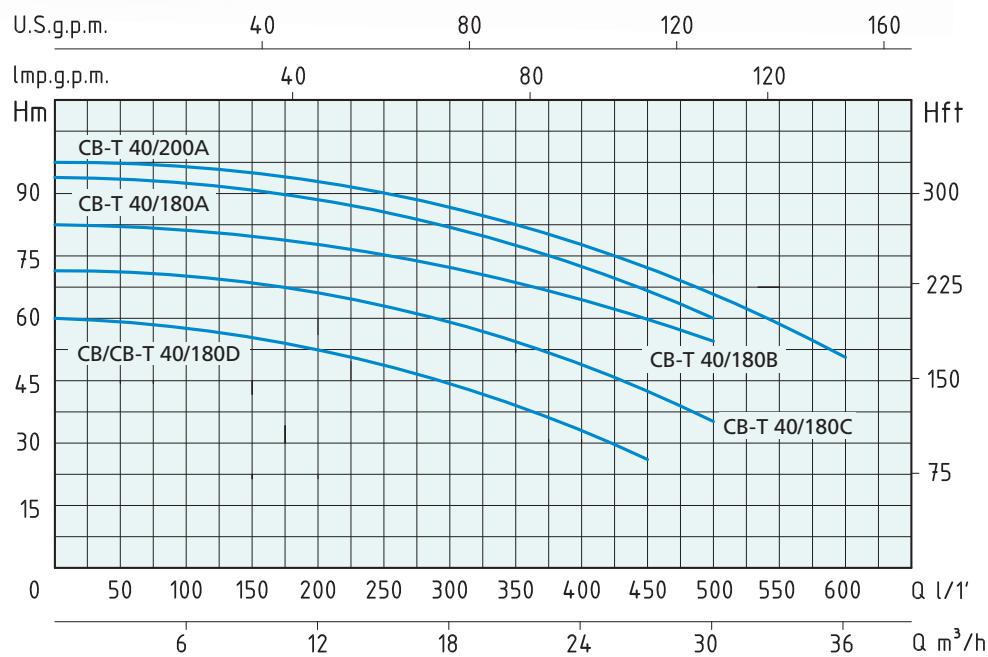


CB 40

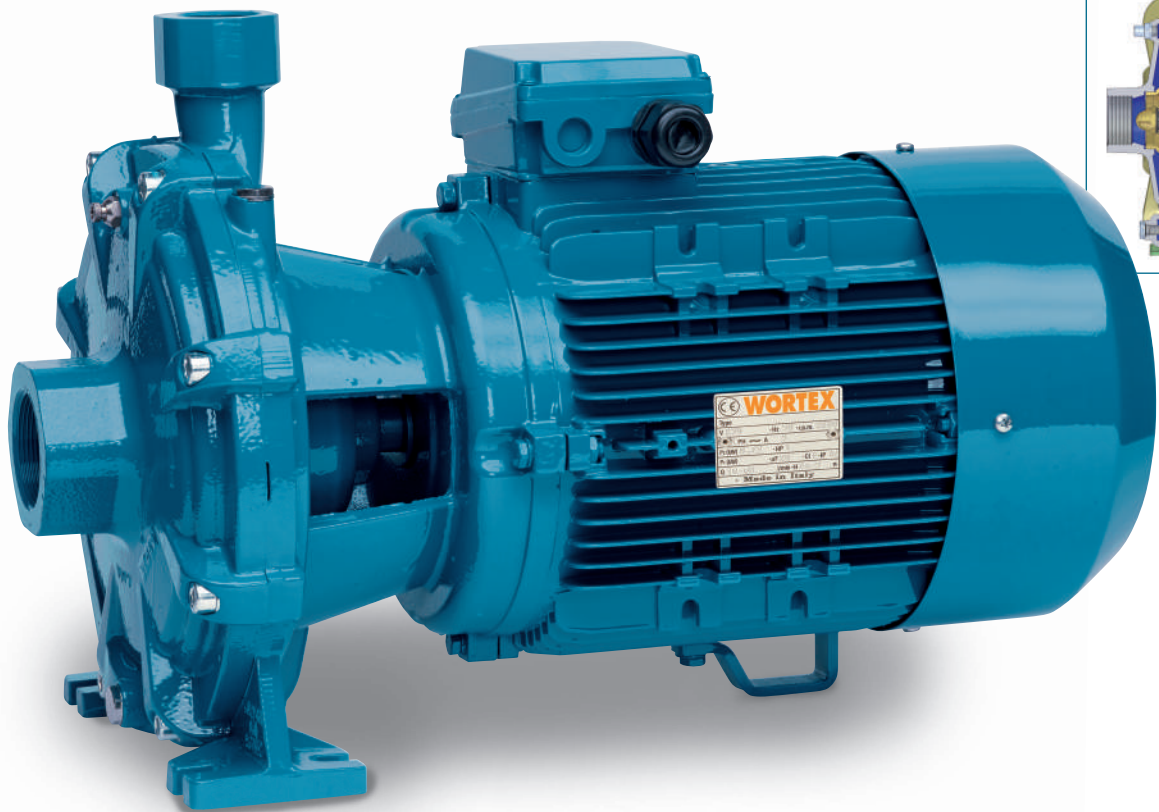

TIPO TYPE		POTENZA NOMINALE NOMINAL POWER		POTENZA ASSORBITA INPUT POWER	AMPERE		Q = PORTATA - CAPACITY										
Monofase Single-phase	Trifase Three-phase	P2		P1	Monofase Single-phase	Trifase Three-phase	m³/h	0	3	6	9	15	18	24	27	30	36
		HP	kW	kW			lt/1'	0	50	100	150	250	300	400	450	500	600
230V-50Hz	230/400V-50Hz				1 x 230V	3 x 400V	Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.										
CB 40/180D	CB-T 40/180D	5,5	4	6	29	9,3	H (m)	60	59	58	56	50	45	34	25		
	CB-T 40/180C	7,5	5,5	8		13		71	70,7	70,5	69	64	60	50	43	35	
	CB-T 40/180B	10	7,5	10		16		87	86	85	83	78	75	65	60	51	
	CB-T 40/180A	12,5	9,2	11,5		18,5		93,5	93,3	93	92	87	82	71	65	58	
	CB-T 40/200A	15	11	13		21		96	95,8	95,5	94,5	90	86	77	71	65	48