


WNX 40

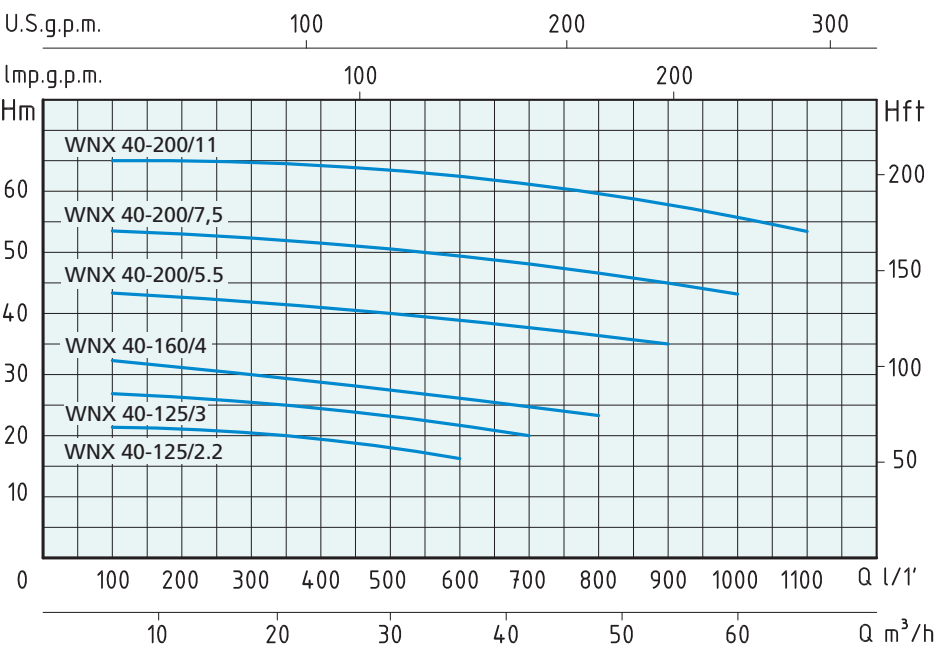

TIPO TYPE	POTENZA NOMINALE NOMINAL POWER		POTENZA ASSORBITA INPUT POWER	AMPERE	Q = PORTATA - CAPACITY												
	P2		P1		Trifase Three-phase	m³/h	6	12	18	24	30	36	42	48	54	60	66
Trifase Three-phase	HP	kW	kW	3 x 400 V	lt/1'	100	200	300	400	500	600	700	800	900	1000	1100	
					Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.												
400V-50Hz																	
WNX 40-125/2,2	3	2,2	2,8	5,1	H (m)	21,5	21,1	20,5	19,5	18	16						
WNX 40-125/3	4	3	3,7	6		26,5	26,1	25,5	24,5	23,5	22	20					
WNX 40-160/4	5,5	4	5,4	8,5		32	31	30	28,8	28	27	26	23				
WNX 40-200/5,5	7,5	5,5	7,7	12,4		43	42,5	41,8	41	40	39	37,8	36,5	35			
WNX 40-200/7,5	10	7,5	10,5	16,5		53,5	52,8	52,1	51,5	50,5	49,5	48,5	47	45	43		
WNX 40-200/11	15	11	15	23,6		65	64,8	64,6	64,4	63,5	62,5	61	59	57	55	53	