
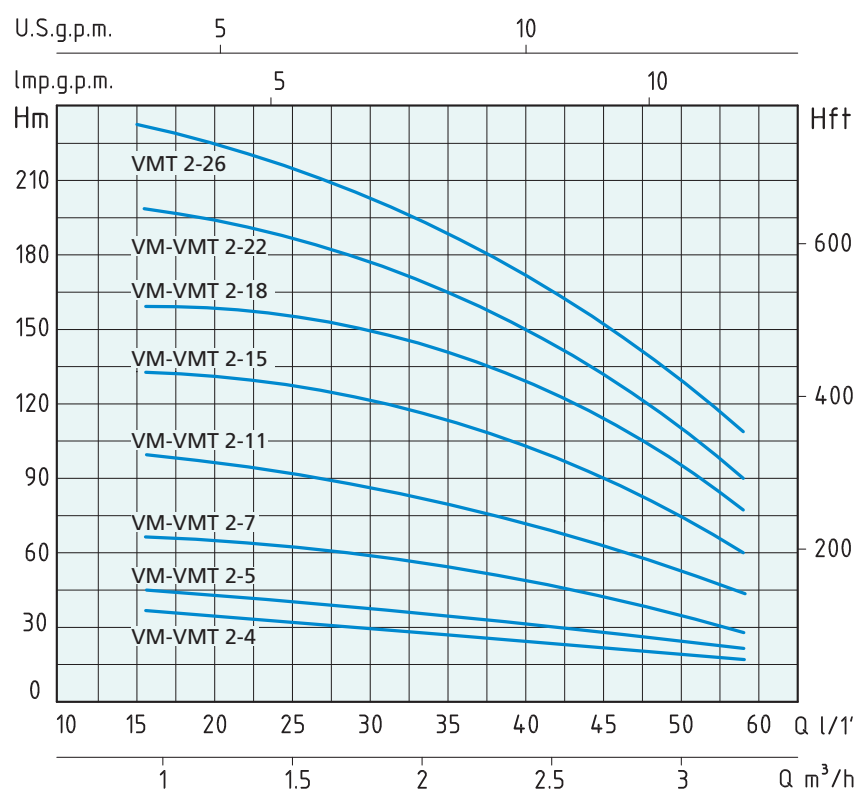


VM 2

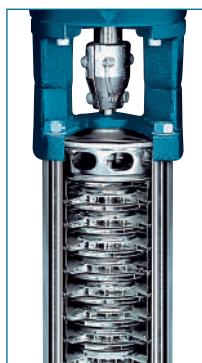

TIPO TYPE		POTENZA NOMINALE NOMINAL POWER		AMPERE		Q = PORTATA - CAPACITY										
Monofase Single-phase	Trifase Three-phase	P2		Monofase Single-phase	Trifase Three-phase	m³/h	1	1,2	1,5	1,6	2	2,4	2,8	3	3,2	3,5
		HP	kW			lt/1'	16	20	25	26	33	40	46	50	53	58
230V-50Hz	230/400V-50Hz			1 x 230V	3 x 400V	Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.										
VM 2-4	VMT 2-4	0,75	0,55	3,4	1,4	H (m)	36	34	32,5	32	29	26,5	23,5	21,5	20	16
VM 2-5	VMT 2-5	0,75	0,55	3,4	1,4		45	43	40,5	40	37	33	30	26	23,5	20
VM 2-7	VMT 2-7	1	0,75	5	1,7		63	60	57,5	57	52	47	42	38	35	28
VM 2-11	VMT 2-11	1,5	1,1	6,9	2,5		98	94	89,5	89	80	73	64	58	53	44
VM 2-15	VMT 2-15	2	1,5	9,7	3,5		134	130	124,5	124	114	104	94	86	78	60
VM 2-18	VMT 2-18	3	2,2	13,5	4,7		161	157	150,5	150	140	129	118	104	93	76
VM 2-22	VMT 2-22	3	2,2	13,5	4,7		197	191	180,5	180	165	150	135	123	110	90
	VMT 2-26	4	3		6,1		232	224	214,5	214	190	175	158	144	130	110