

AS




AS 200



AS 300



Girante HCR
High chrome impeller



Base per cavo epossidico
Epoxy Cable Base




Protezione termica
Thermic protection



Doppia tenuta meccanica
Double Mechanical Seals



Motore a secco
ad alta efficienza
High Efficiency Dry Motor

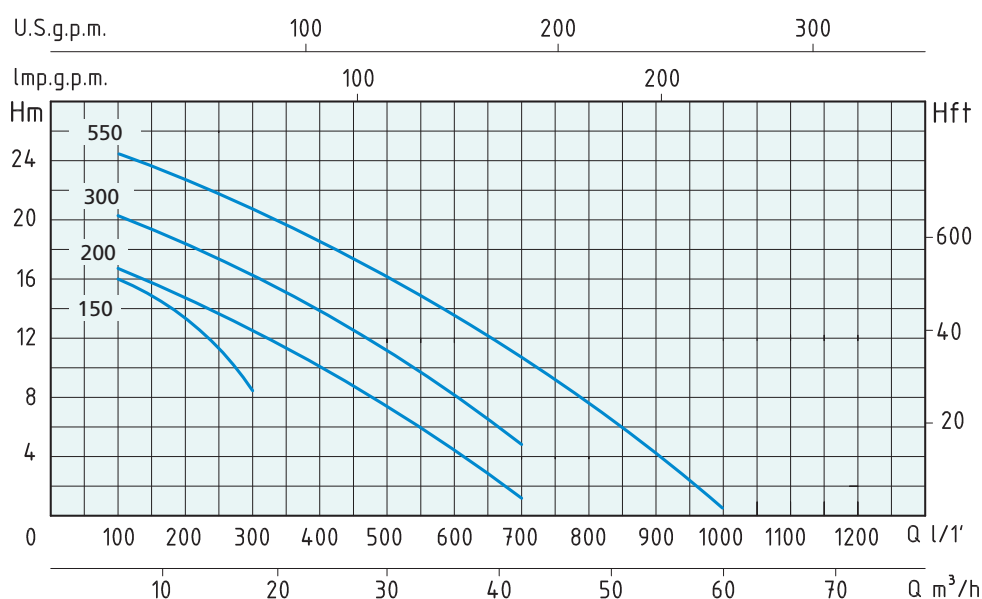

TIPO TYPE		POTENZA NOMINALE NOMINAL POWER		AMPERE		Q = PORTATA - CAPACITY							
Monofase Single-phase	Trifase Three-phase	P2		Monofase Single-phase	Trifase Three-phase	m³/h	6	12	18	30	42	48	60
230V-50Hz	230/400V-50Hz	HP	kW	1 x 230V	3 x 400V	lt/1'	100	200	300	500	700	800	1000
AS 150		1,5	1,1	8,2		Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.							
AS 150-S		1,5	1,1	8,2		H (m)	16	13,5	10,5				
AS 200	AS 200 T	2	1,5	10	3,5		16	13,5	10,5				
AS 200-S		2	1,5	10			16,5	14,4	12,3	7,2	1,6		
	AS 300 T	3	2,2		5		16,5	14,4	12,3	7,2	1,6		
	AS 550 T	5	4		8,2		20,5	18,6	16,4	11,4	4,6		
							24,5	23	21	16	11	7	1