




Girante HCR
High chrome impeller



Base per cavo epossidico
Epoxy Cable Base




Protezione termica
Thermic protection



Doppia tenuta meccanica
Double Mechanical Seals



Motore a secco
ad alta efficienza
High Efficiency Dry Motor

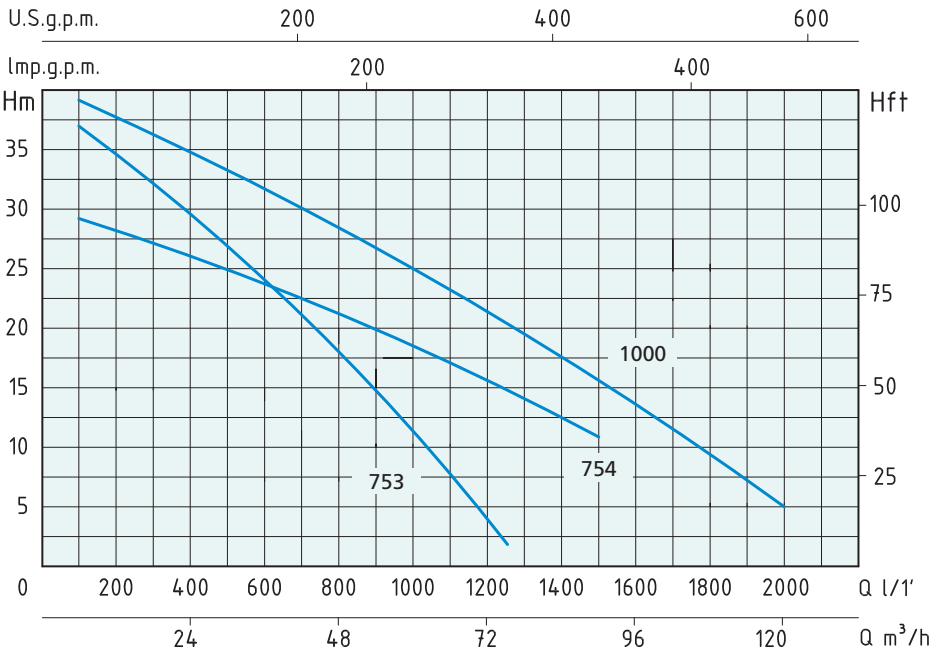

TIPO TYPE	POTENZA NOMINALE NOMINAL POWER		AMPERE	Q = PORTATA - CAPACITY										
Trifase Three-phase	P2		Trifase Three-phase	m³/h	6	12	18	30	42	48	60	75	90	120
	HP	kW		lt/1'	100	200	300	500	700	800	1000	1250	1500	2000
230/400V-50Hz			3 x 400V	Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.										
AS 753 T			7,5	5,5	11,6	H (m)	37	35	32	28	21	18,6	12,5	2,3
AS 754 T	7,5	5,5	11,6	29	28		27	25,1	22,3	21,5	19	15,1	10,8	
AS 1000 T	10	7,5	15,3	39	37,5		36	33,5	29,7	28	24,8	19	12	5