


# SUB-Plastic

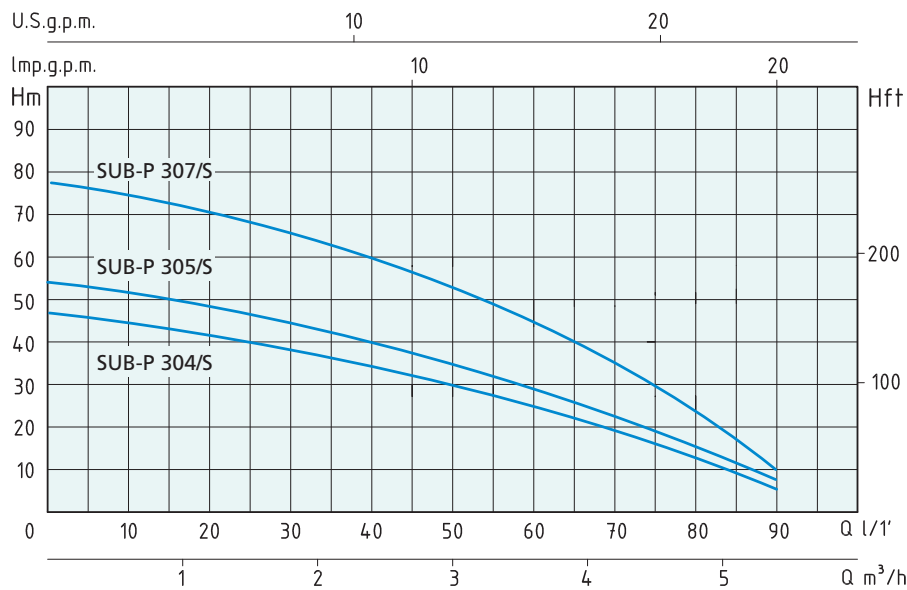

| TIPO<br>TYPE             | POTENZA<br>ASSORBITA<br>INPUT POWER | AMPERE                   | Condensatore<br>Capacitor | Q = PORTATA - CAPACITY                                              |     |     |     |     |    |     |     |     |
|--------------------------|-------------------------------------|--------------------------|---------------------------|---------------------------------------------------------------------|-----|-----|-----|-----|----|-----|-----|-----|
| Monofase<br>Single-phase | P1                                  | Monofase<br>Single-phase | µf                        | m³/h                                                                | 0,6 | 1,2 | 1,8 | 2,4 | 3  | 3,6 | 4,2 | 4,5 |
|                          | Watt                                |                          |                           | lt/1'                                                               | 10  | 20  | 30  | 40  | 50 | 60  | 70  | 75  |
| 230V-50Hz                |                                     | 1 x 230V                 |                           | Prevalenza manometrica totale in m.C.A. - Total head in meters w.c. |     |     |     |     |    |     |     |     |
| SUB-P 304/S              | 850                                 | 4,1                      | 20                        | H<br>(m)                                                            | 40  | 37  | 32  | 29  | 24 | 20  | 16  | 13  |
| SUB-P 305/S              | 1100                                | 5                        | 20                        |                                                                     | 51  | 49  | 44  | 40  | 35 | 29  | 22  | 19  |
| SUB-P 307/S              | 1350                                | 6,3                      | 30                        |                                                                     | 75  | 71  | 65  | 60  | 52 | 42  | 31  | 25  |