



GR BluePRO 200/2/G40H A1CT6

3~ 60 Hz

Note: Accessory must be ordered separately



L2: Minimum operating level for discontinuous use





better together

Data sheet

GR BluePRO 150/2/G40H A1CT5

Technical specification

3~ 50 Hz

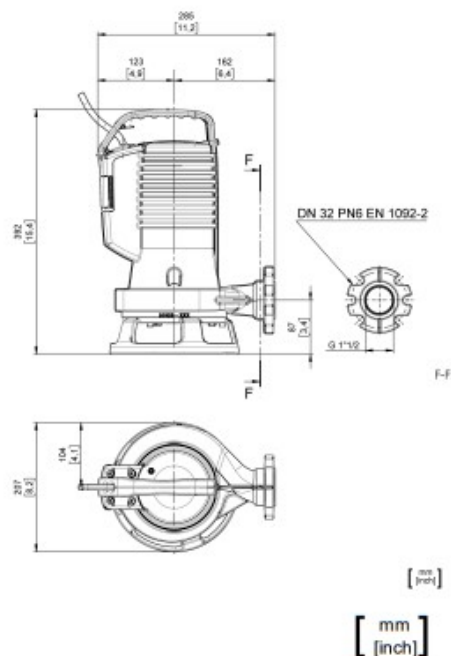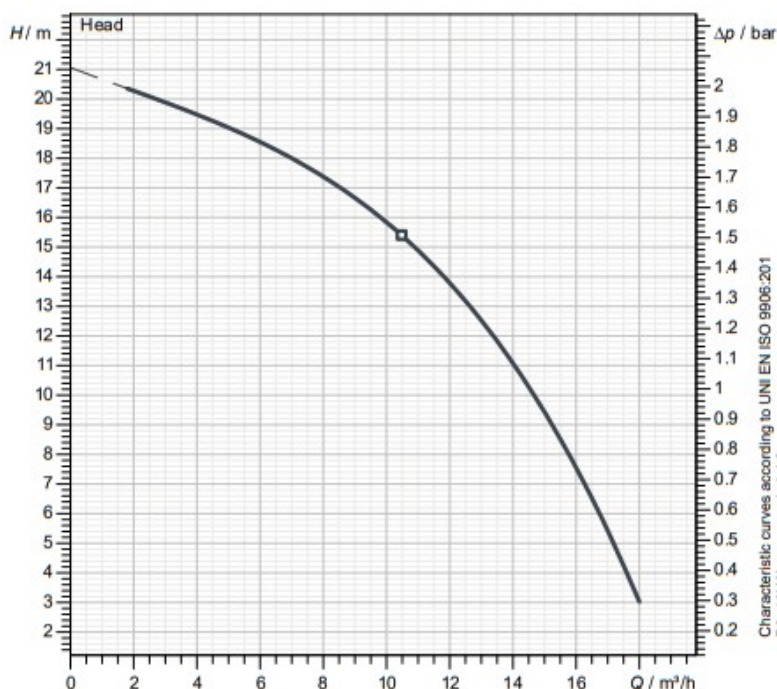

Pump

Series	BluePRO series
Type	GR BluePRO 150/2/G40H A1CT5
Version	TR 10NN 400D NN NN
Standard	EN 809:2009

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m³
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Motor data

Rated voltage	400 V
Frequency	50 Hz
Motor phases	3~
Number of poles	2
Rated power P2	1.10 kW
Incoming power P1	1.57 kW
Rated current	3.20 A
rpm	2900 1/min
cos φ	0.71
Rated torque	3.6 Nm
Start	Direct starting
Degree of protection	IP 68
Insulation class	F

Construction materials

Case	Cast iron EN-GJL 250
Shaft	Stainless steel - AISI 431
Hydraulic	Cast iron - EN-GJL 250
Impeller	Cast iron - EN-GJL 250
Painting/Coating	Bi-epoxy 120 μm
Screws	Stainless steel - Class A2-70
Gaskets	NBR
Foot base (if present)	Cast iron - EN-GJS 600
Cutter	Chromium steel - X102 CrMo17 KU
Cutting disk	Chromium steel - X102 CrMo17 KU

Construction features

Main cable	4G1
Control cable	-
Cable length	10 mt
Mechanical seals	2 in silicon carbide (2SiC)
Additional drilling	-
Weight*	24 kg
Electrical variant	Thermal protection and relays

* cable and fixing system excluded

Hydraulic

Type	GR (Impeller with grinder system)
Free passage	0 mm
Impeller type	Open channel impeller with grinder system
Suction	-
Discharge	DN 32 - G 1 1/2 EN 1092-2
Curve tolerance	UNI EN ISO 9906:2012

Rev. 4 - 09/03/2022

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

Created on 2022-06-15

zenit.com

Page 3 / 5



better together


Data sheet

GR BluePRO 150/2/G40H A1CT5

Pump performance curves

3~ 50 Hz

Hydraulic type GR (Impeller with grinder system)		Impeller type Open channel impeller with grinder system		Free passage 0 mm	Discharge DN 32 - G 1"1/2	Suction -
DUTY POINT						
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998.3 kg/m³	Viscosity 1.005 mm²/s	

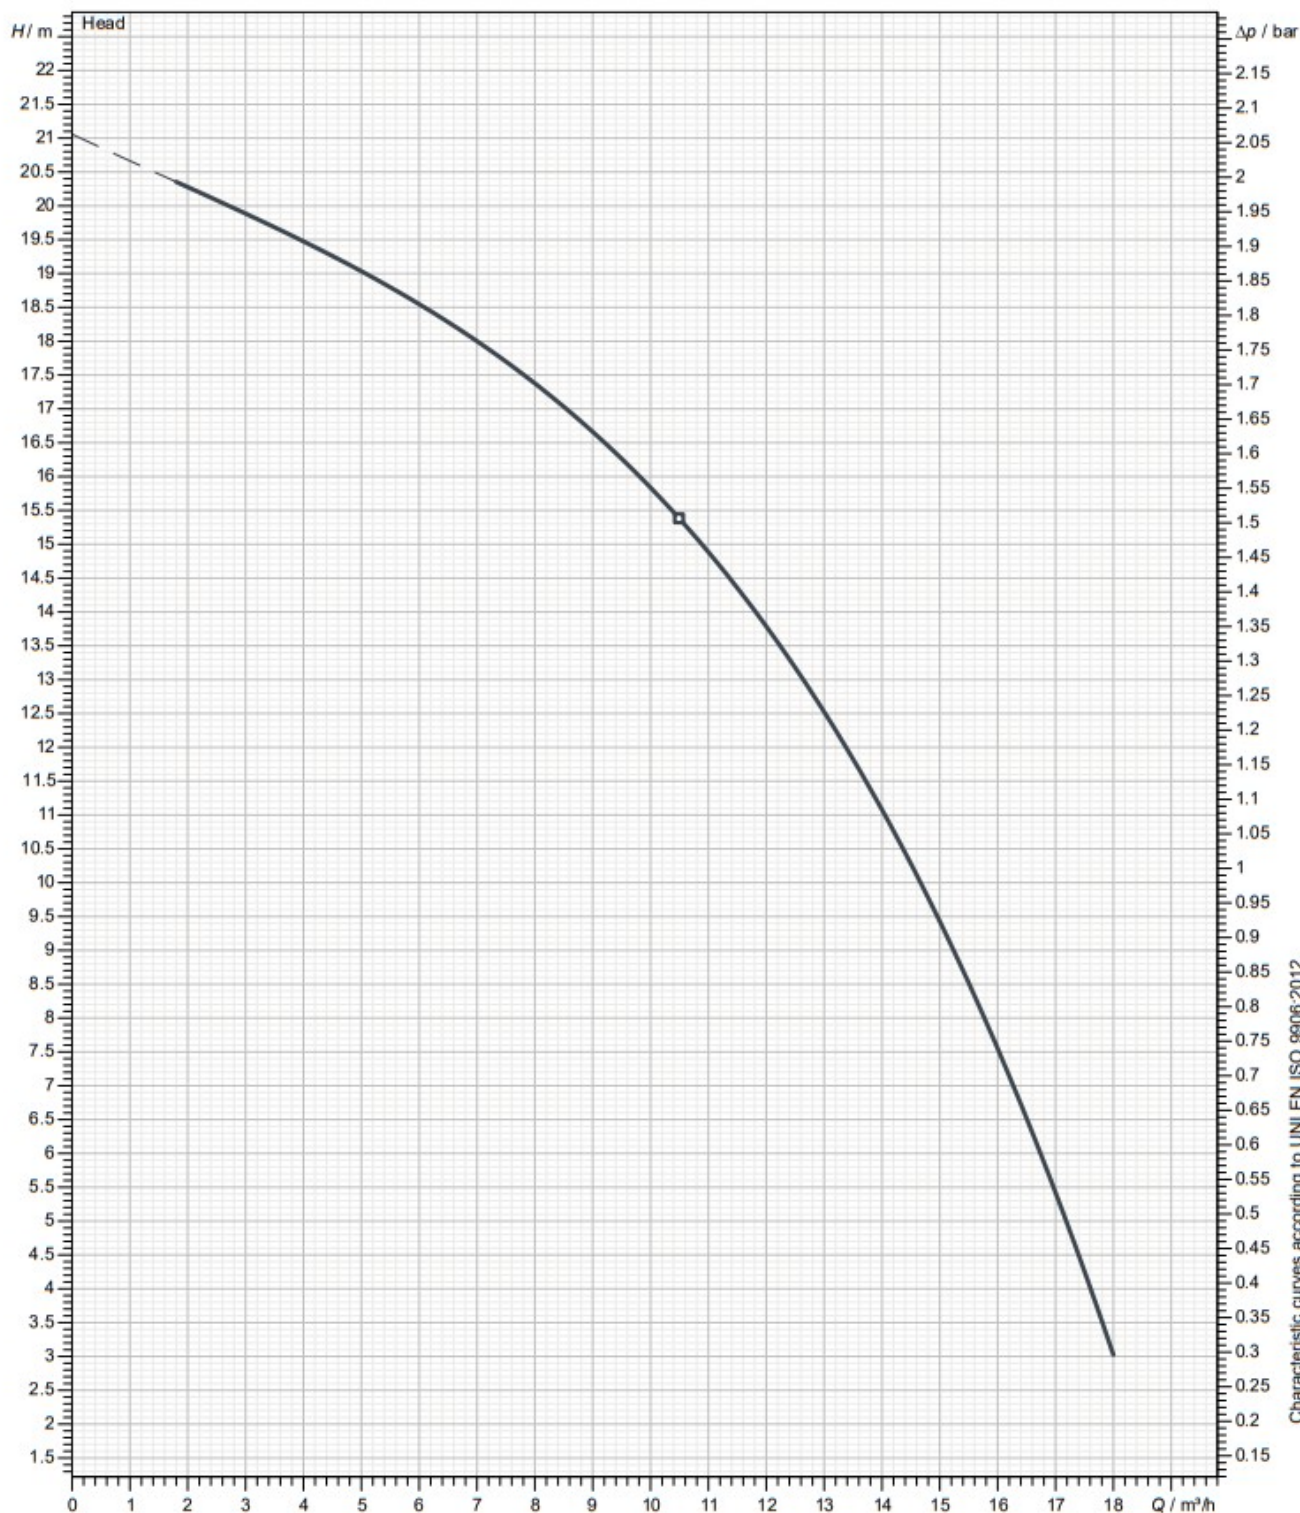

Characteristic curves according to UNI EN ISO 9906:2012
P2<10kW: paragraph 4.4.2
10kW<P2<100kW: Grade 3B
P2>100kW: Grade 2B



better together


Data sheet

GR BluePRO 150/2/G40H A1CT5

Dimensional drawing

3~ 50 Hz

Installation type Installation with bottom coupling device - Horizontal/vertical outlet		
Wet/dry use WET	Drilling variant N	Flushing valve - drilling -
Discharge DN 32 - G 1 1/2 EN 1092-2	Suction: -	Pressure rating (suction/discharge): PN 6
Accessory DAC 32-50/G50H-G50V+KAF 3/4" EN (P)		Accessory code 9028.010
Note: Accessory must be ordered separately		

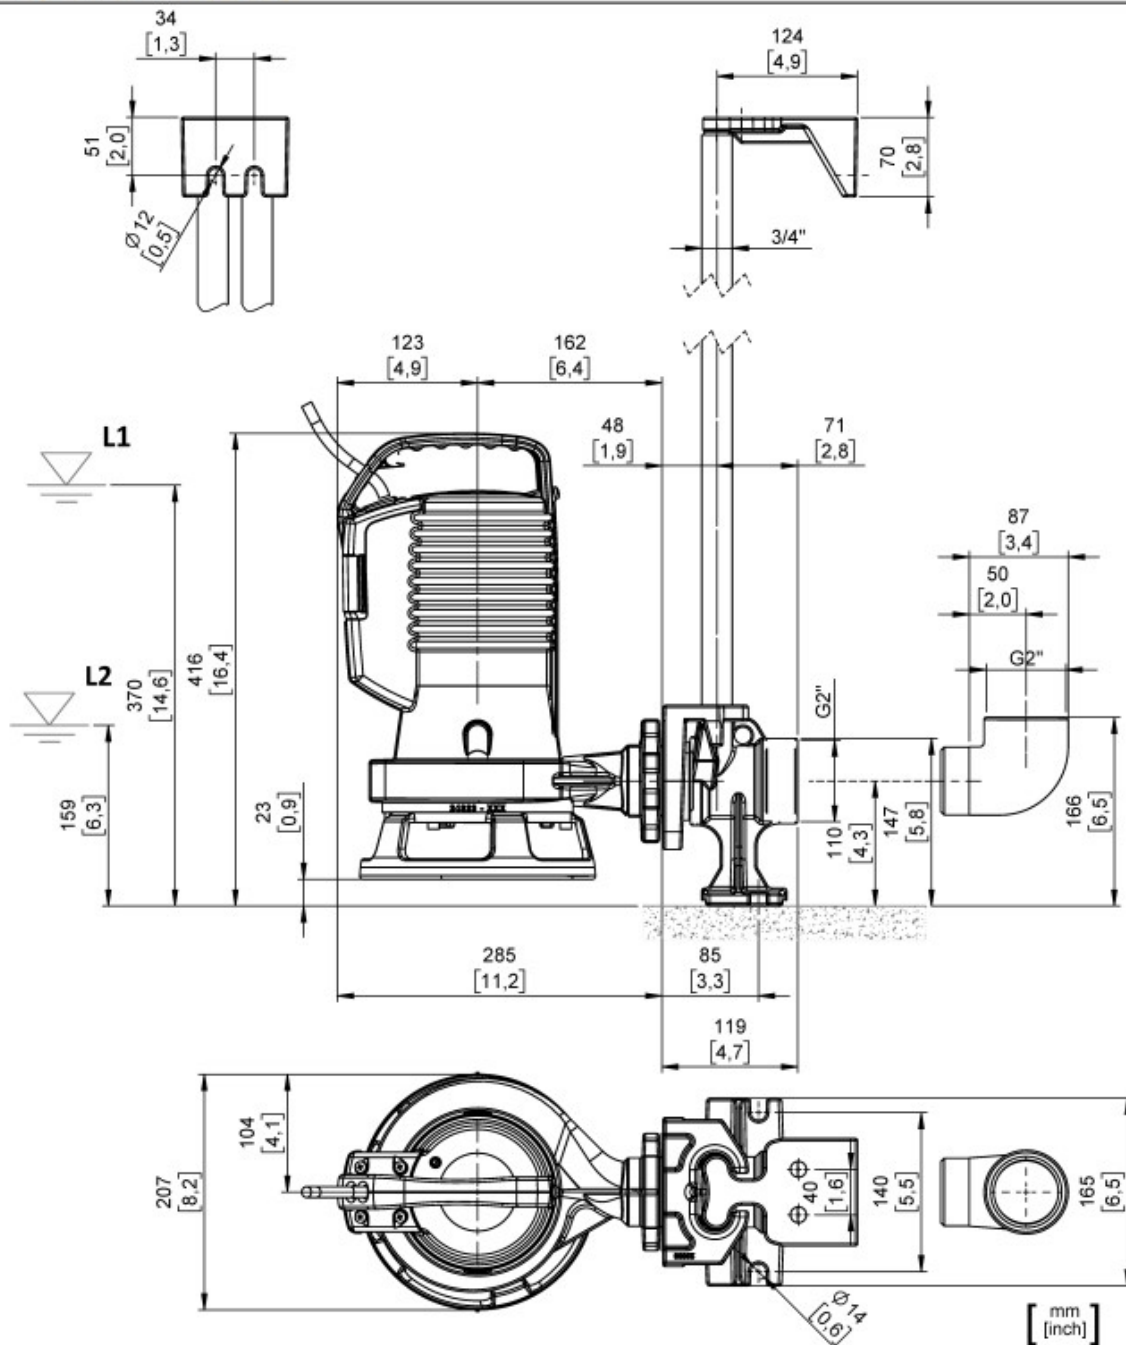

L1: Minimum operating level for continuous use

L2: Minimum operating level for discontinuous use





better together

Data sheet

GR BluePRO 200/2/G40H A1CT5

Technical specification

3~ 50 Hz

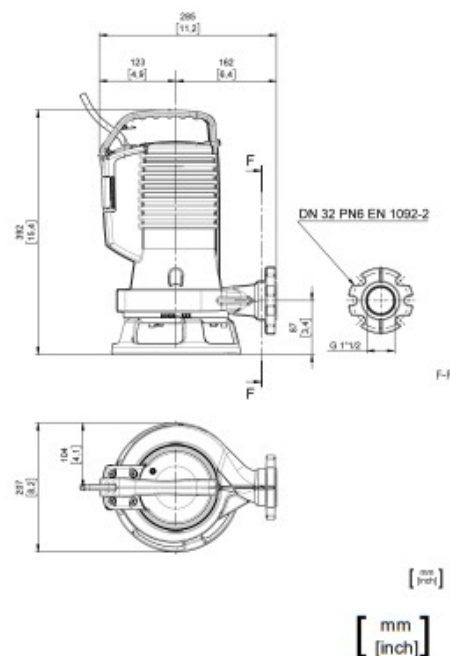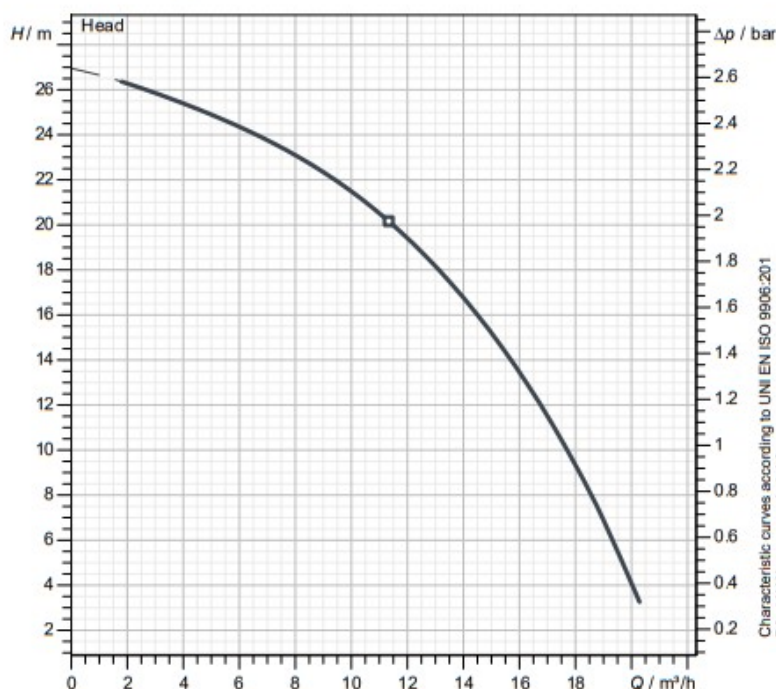

Pump

Series	BluePRO series
Type	GR BluePRO 200/2/G40H A1CT5
Version	TR 10NN 400D NN NN
Standard	EN 809:2009

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m³
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Motor data

Rated voltage	400 V
Frequency	50 Hz
Motor phases	3~
Number of poles	2
Rated power P2	1.50 kW
Incoming power P1	2.17 kW
Rated current	4.30 A
rpm	2900 1/min
cos φ	0.73
Rated torque	4.9 Nm
Start	Direct starting
Degree of protection	IP 68
Insulation class	F

Construction materials

Case	Cast iron EN-GJL 250
Shaft	Stainless steel - AISI 431
Hydraulic	Cast iron - EN-GJL 250
Impeller	Cast iron - EN-GJL 250
Painting/Coating	Bi-epoxy 120 μm
Screws	Stainless steel - Class A2-70
Gaskets	NBR
Foot base (if present)	Cast iron - EN-GJS 600
Cutter	Chromium steel - X102 CrMo17 KU
Cutting disk	Chromium steel - X102 CrMo17 KU

Construction features

Main cable	4G1
Control cable	-
Cable length	10 mt
Mechanical seals	2 in silicon carbide (2SiC)
Additional drilling	-
Weight*	25 kg
Electrical variant	Thermal protection and relays

* cable and fixing system excluded

Hydraulic

Type	GR (Impeller with grinder system)
Free passage	0 mm
Impeller type	Open channel impeller with grinder system
Suction	-
Discharge	DN 32 - G 1"1/2 EN 1092-2
Curve tolerance	UNI EN ISO 9906:2012

Rev. 4 - 09/03/2022

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

Created on 2022-06-15

zenit.com

Page 3 / 5



better together


Data sheet

GR BluePRO 200/2/G40H A1CT5

Pump performance curves

3~ 50 Hz

Hydraulic type GR (Impeller with grinder system)		Impeller type Open channel impeller with grinder system	Free passage 0 mm	Discharge DN 32 - G 1"1/2	Suction -
DUTY POINT					
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998.3 kg/m ³	Viscosity 1.005 mm ² /s

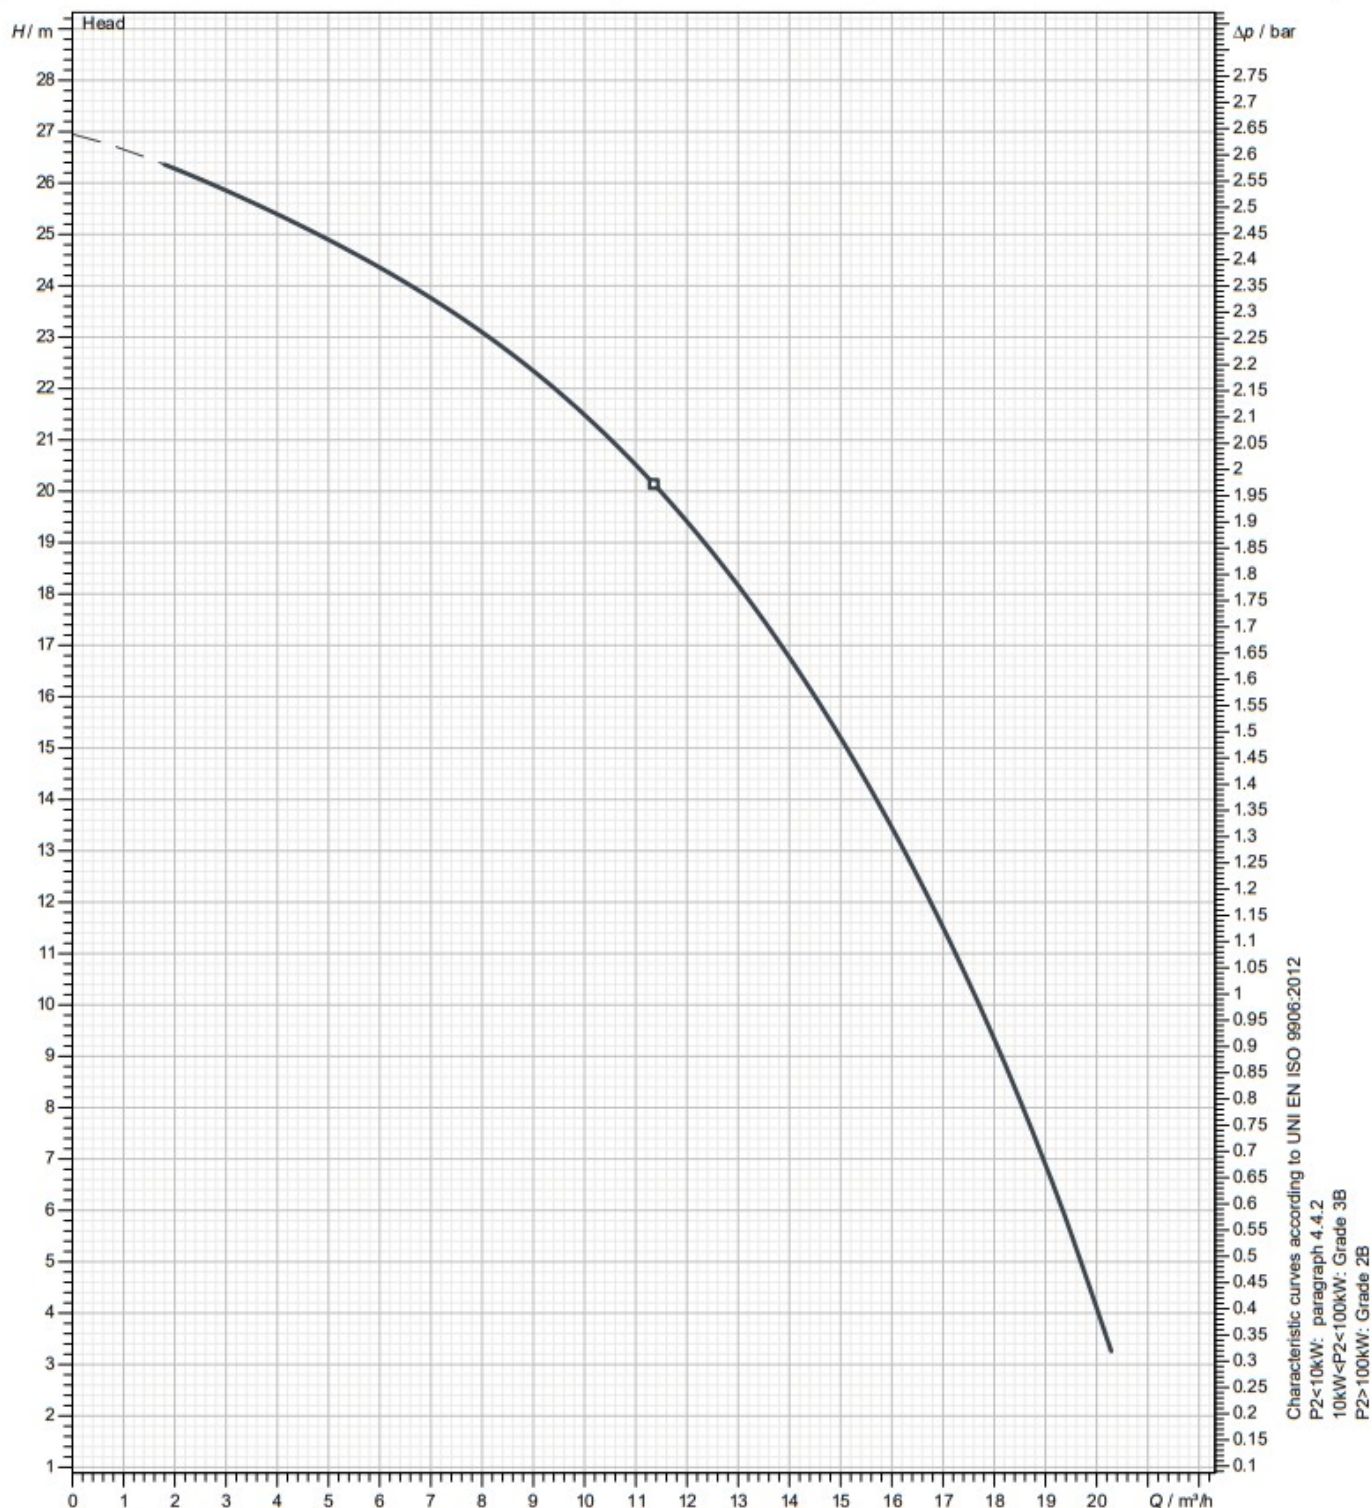

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

zenit.com

Created on: 2022-06-15

Page 4 / 5



better together


Data sheet

GR BluePRO 200/2/G40H A1CT5

Dimensional drawing

3~ 50 Hz

Installation type Installation with bottom coupling device - Horizontal/vertical outlet		
Wet/dry use WET	Drilling variant N	Flushing valve - drilling -
Discharge DN 32 - G 1 1/2 EN 1092-2	Suction: -	Pressure rating (suction/discharge): PN 6
Accessory DAC 32-50/G50H-G50V+KAF 3/4" EN (P)		Accessory code 9028.010
Note: Accessory must be ordered separately		

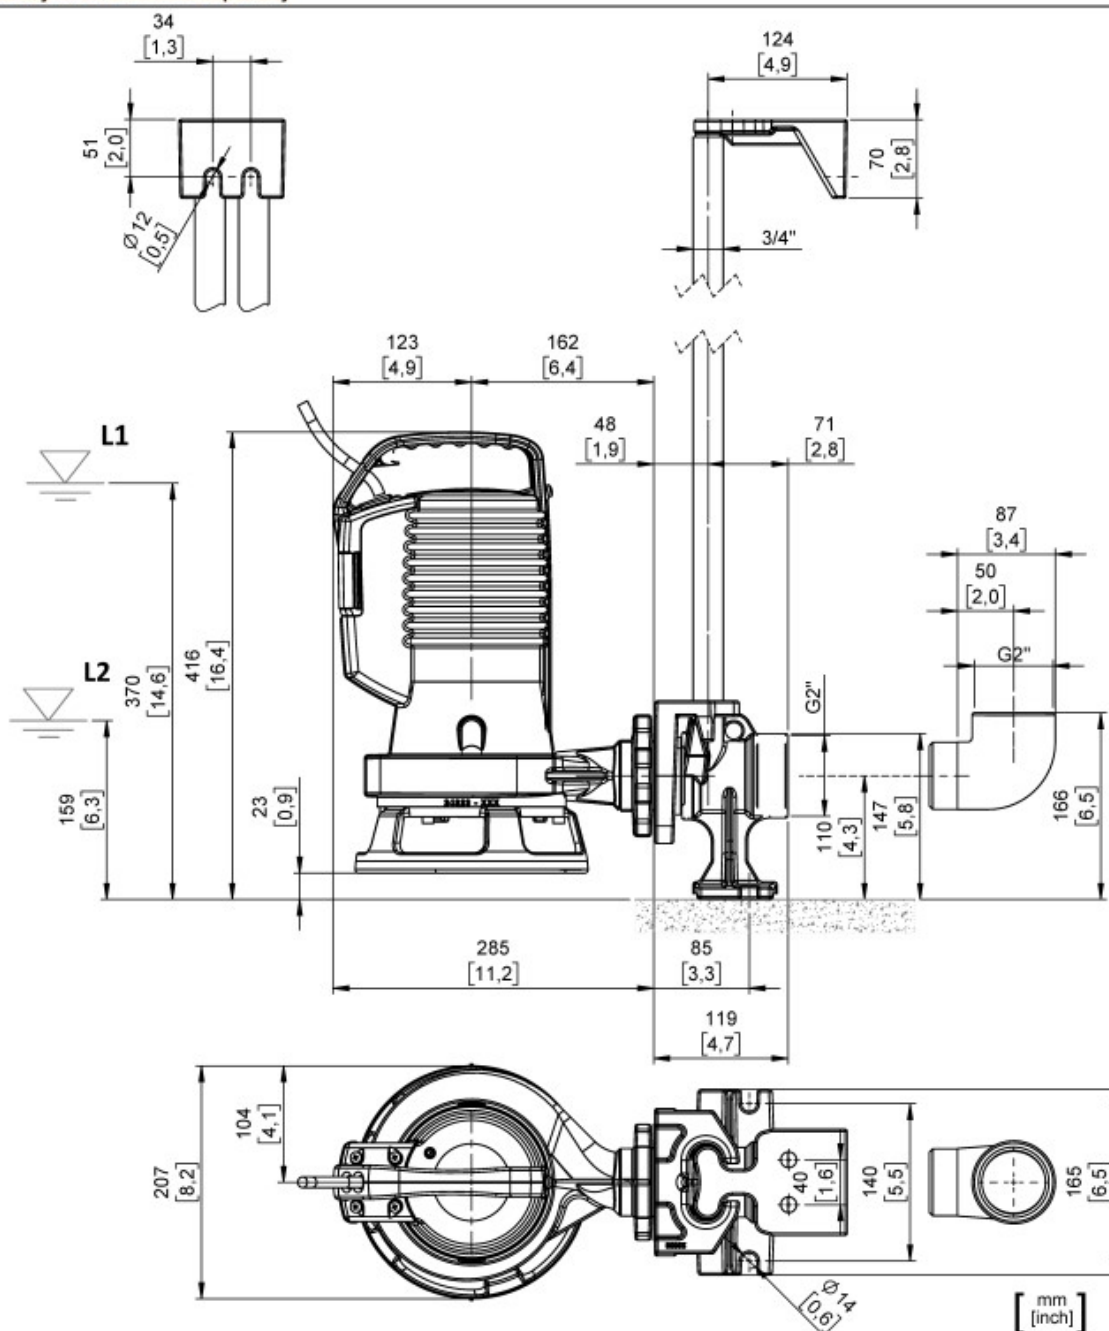

L1: Minimum operating level for continuous use

L2: Minimum operating level for discontinuous use

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

zenit.com

Created on 2022-06-15

Page 5 / 5





better together

Data sheet

GR BluePRO 200/2/G40H A1CT6

Technical specification

3~ 60 Hz

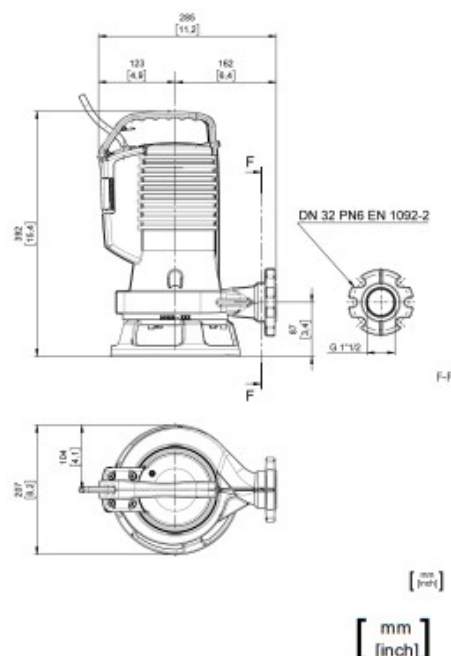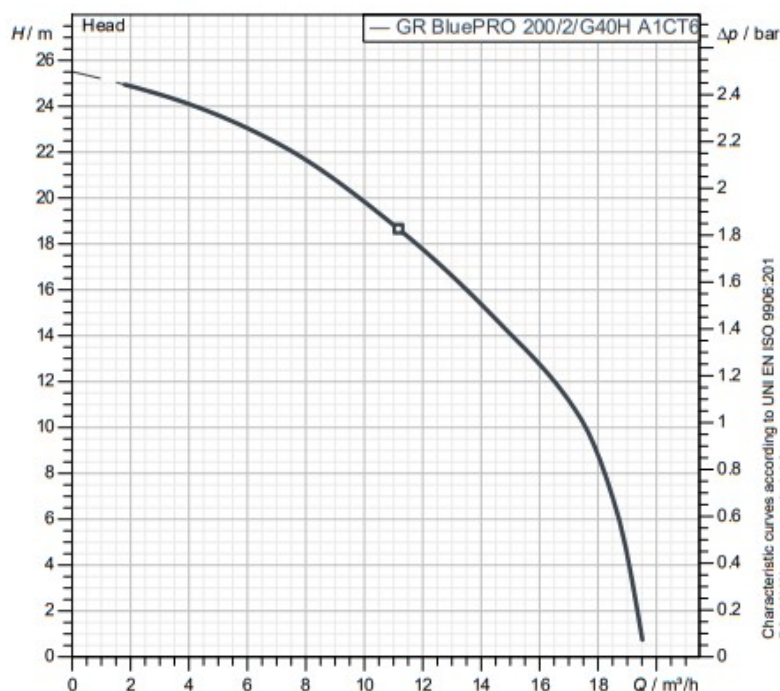

Pump

Series	BluePRO series
Pump name	GR BluePRO 200/2/G40H A1CT6
Version	NGTRB51040N00NN
Standard	EN 809:2009

Operating limits (standard pumps)

Max. ambient temperature	40 °C
Max. density treated liquid	1100 kg/m³
pH treated liquid	6 ÷ 14
Max. start per hour (equally distributed)	30
Wet/dry use	WET
Max. acoustic pressure level	70 dB
Operating mode	S1 - Continuous use

Motor data

Rated voltage	400 V
Frequency	60 Hz
Motor phases	3~
Number of poles	2
Rated power P2	1.50 kW
Incoming power P1	2.20 kW
Rated current	4.30 A
rpm	3480 1/min
cos φ	0.74
Rated torque	4.1 Nm
Start	Direct starting
Degree of protection	IP 68
Insulation class	F

Construction materials

Case	Cast iron EN-GJL 250
Shaft	Stainless steel - AISI 431
Hydraulic	Cast iron - EN-GJL 250
Impeller	Cast iron - EN-GJL 250
Painting/Coating	Bi-epoxy 120 μm
Screws	Stainless steel - Class A2-70
Gaskets	NBR
Foot base (if present)	Cast iron - EN-GJS 600
Cutter	Chromium steel - X102 CrMo17 KU
Cutting disk	Chromium steel - X102 CrMo17 KU

Construction features

Main cable	4G1
Control cable	-
Cable length	10 mt
Mechanical seals	2 in silicon carbide (2SiC)
Additional drilling	-
Weight*	25 kg
Electrical variant	Thermal protection and relays

* cable and fixing system excluded

Hydraulic

Type	GR (Impeller with grinder system)
Free passage	0 mm
Impeller type	Open channel impeller with grinder system
Suction	-
Discharge	DN 32 - G 1"1/2 EN 1092-2
Curve tolerance	UNI EN ISO 9906:2012

Rev. 3 - 01/02/2022

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

Created on 2022-06-01

zenit.com

Page 3 / 5



better together


Data sheet

GR BluePRO 200/2/G40H A1CT6

Pump performance curves

3~ 60 Hz

Hydraulic type GR (Impeller with grinder system)		Impeller type Open channel impeller with grinder system	Free passage 0 mm	Discharge DN 32 - G 1"1/2	Suction -
DUTY POINT					
Flow	Head	Shaft power P2	Hydraulic efficiency	Density 998.3 kg/m ³	Viscosity 1.005 mm ² /s

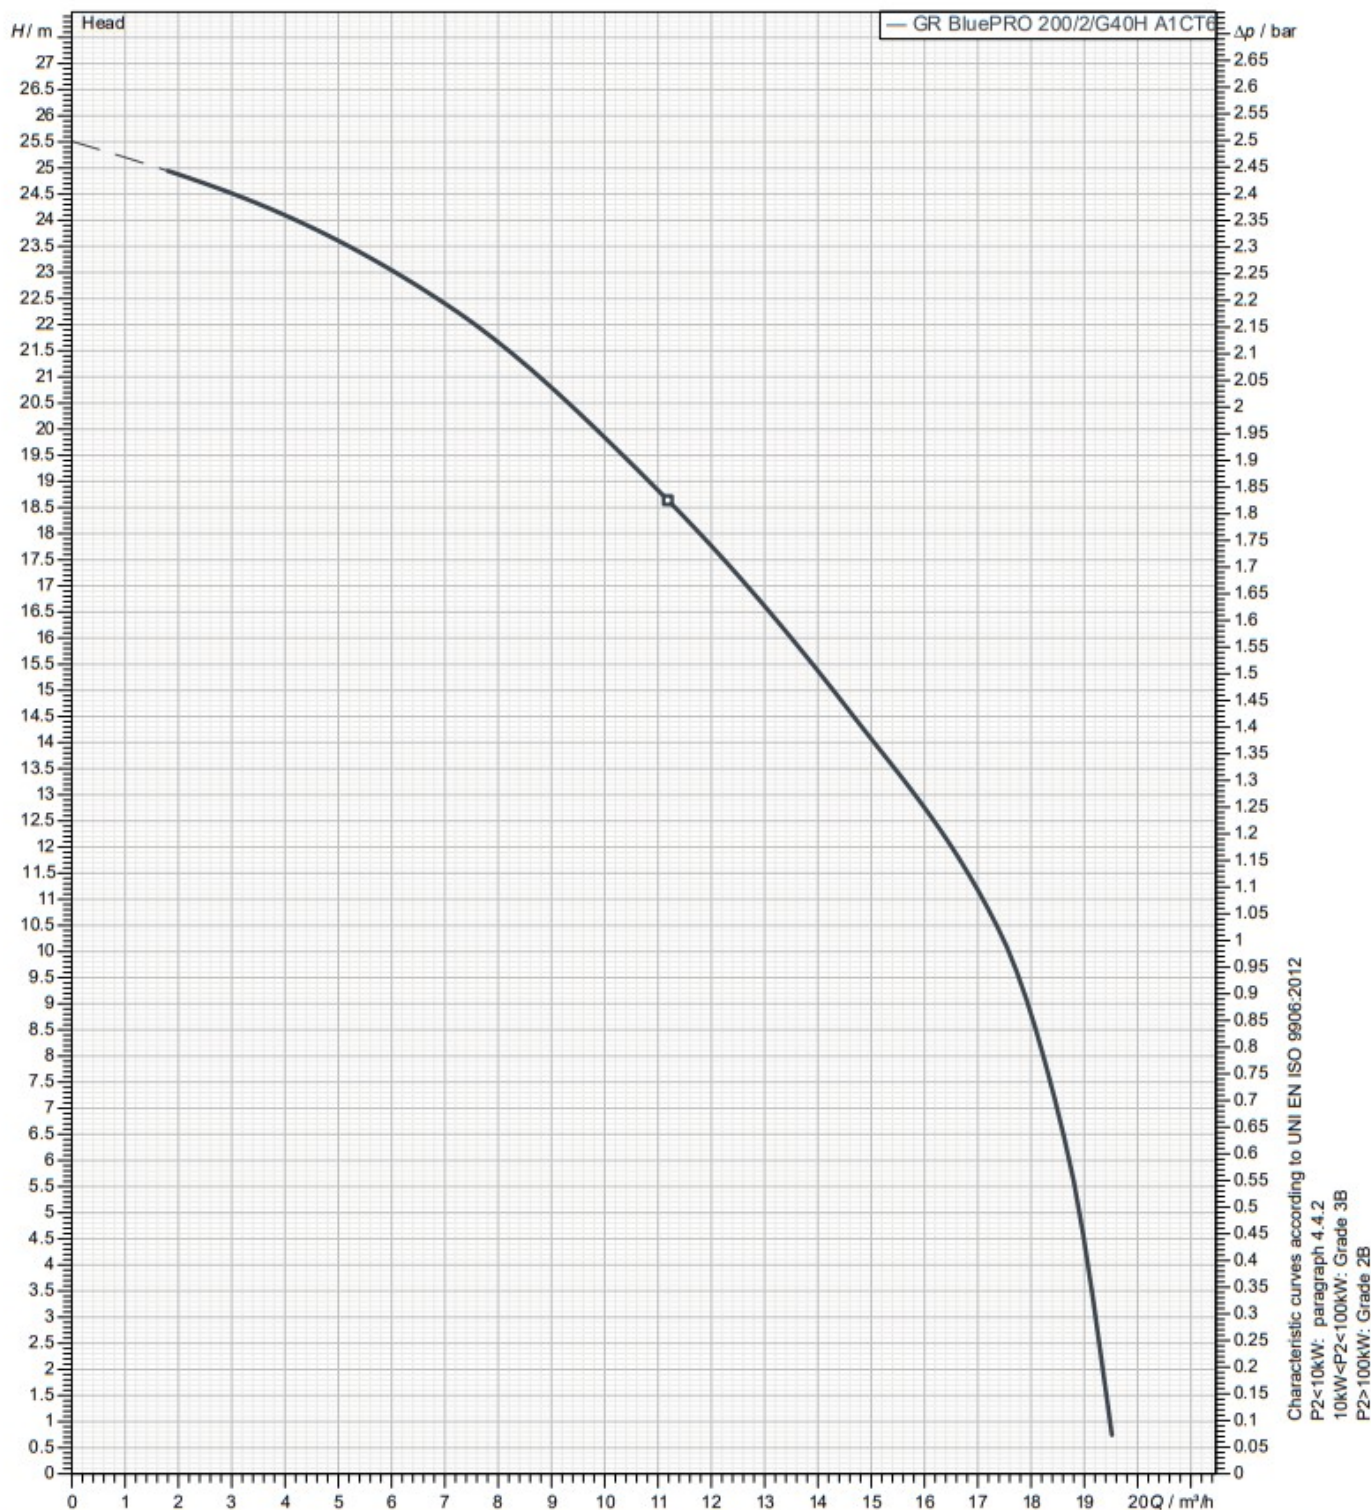

All data shown are not binding. Zenit reserves the right to change data and dimensions without notice.

zenit.com

Created on: 2022-06-01

Page 4 / 5