
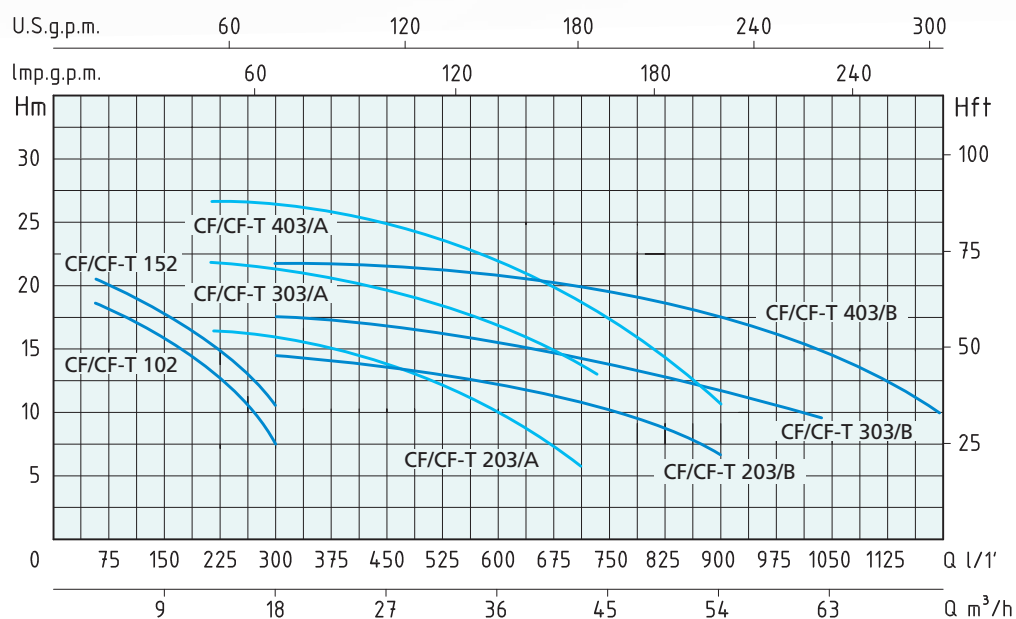


CF

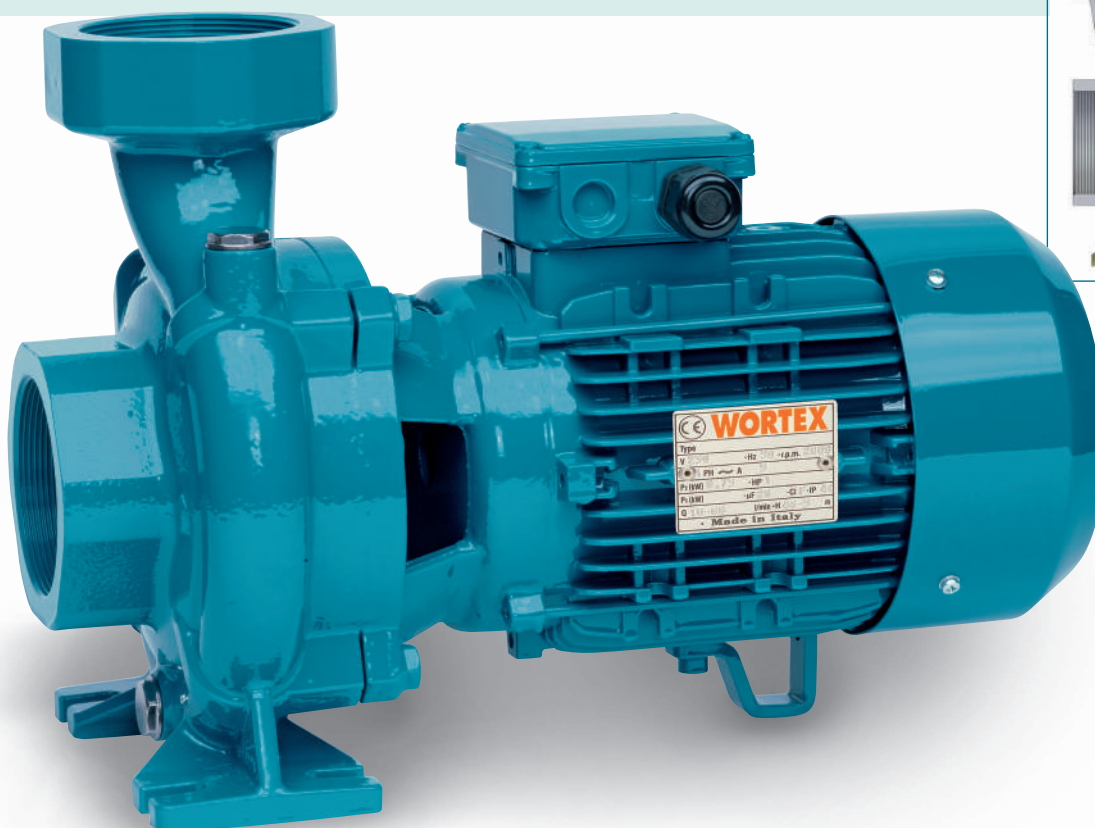

TIPO TYPE		POTENZA NOMINALE NOMINAL POWER		POTENZA ASSORBITA INPUT POWER	AMPERE		Q = PORTATA - CAPACITY										
Monofase Single-phase	Trifase Three-phase	P2		P1	Monofase Single-phase	Trifase Three-phase	Q = PORTATA - CAPACITY										
		HP	KW	KW			m ³ /h	3	6	12	18	24	30	42	54	60	72
230V-50Hz	230/400V-50Hz				1 x 230V	3 x 400V	lt/1'	50	100	200	300	400	500	700	900	1000	1200
CF 102	CF-T 102	1	0,8	1,15	5,5	2,5	Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.										
CF 152	CF-T 152	1,5	1,1	1,45	7	3,5	18	17	13,5	7,5							
CF 203/A	CF-T 203/A	2	1,5	2,4	10,7	5	21	19,5	16	10,5							
CF 203/B	CF-T 203/B	2	1,5	2,4	10,7	5			16	15	14	12,5	6				
CF 303/A	CF-T 303/A	3	2,2	3,3	15	5,5				13,9	13,5	13	10,5	7			
CF 303/B	CF-T 303/B	3	2,2	3,3	15	5,5				22	21	20	18,5	13			
CF 403/A	CF-T 403/A	4	3	4,5	20	7,3				17,4	17,2	17	15	11,5	9,5		
CF 403/B	CF-T 403/B	4	3	4,5	20	7,3				26,5	26	25	23,5	18,5	11		
											21,4	21,2	20,5	19	16,5	14,5	10