


# MULTI VX 4

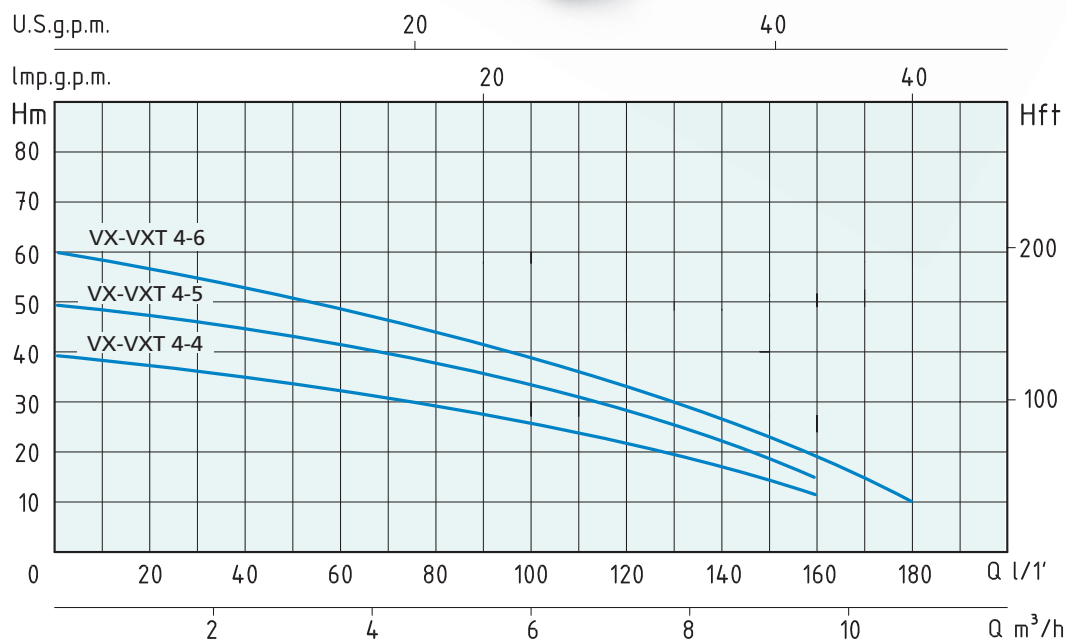

| TIPO<br>TYPE             |                        | POTENZA<br>NOMINALE<br>NOMINAL<br>POWER |      | POTENZA<br>ASSORBITA<br>INPUT<br>POWER | AMPERE                   |                        | Q = PORTATA - CAPACITY                                              |      |      |     |     |     |      |      |      |      |
|--------------------------|------------------------|-----------------------------------------|------|----------------------------------------|--------------------------|------------------------|---------------------------------------------------------------------|------|------|-----|-----|-----|------|------|------|------|
| Monofase<br>Single-phase | Trifase<br>Three-phase | P2                                      |      | P1                                     | Monofase<br>Single-phase | Trifase<br>Three-phase | m³/h                                                                | 0    | 1,2  | 2,4 | 3,6 | 4,8 | 6    | 8,4  | 9,6  | 10,8 |
|                          |                        | HP                                      | kW   | kW                                     |                          |                        | lt/1'                                                               | 0    | 20   | 40  | 60  | 80  | 100  | 140  | 160  | 180  |
| 230V-50Hz                | 230/400V-50Hz          |                                         |      |                                        | 1 x 230V                 | 3 x 400V               | Prevalenza manometrica totale in m.C.A. - Total head in meters w.c. |      |      |     |     |     |      |      |      |      |
| MULTI VX 4-4             | MULTI VXT 4-4          | 1                                       | 0,75 | 1,1                                    | 5,2                      | 2                      | H<br>(m)                                                            | 39,5 | 37,5 | 35  | 32  | 29  | 25,5 | 17,5 | 12   |      |
| MULTI VX 4-5             | MULTI VXT 4-5          | 1,25                                    | 0,9  | 1,45                                   | 6,5                      | 3,3                    |                                                                     | 49,5 | 48   | 45  | 42  | 38  | 34   | 24   | 17,5 |      |
| MULTI VX 4-6             | MULTI VXT 4-6          | 1,5                                     | 1,1  | 1,6                                    | 7,3                      | 3,5                    |                                                                     | 60   | 57   | 53  | 48  | 44  | 38,5 | 26,5 | 18,5 | 10   |