


# VM 4

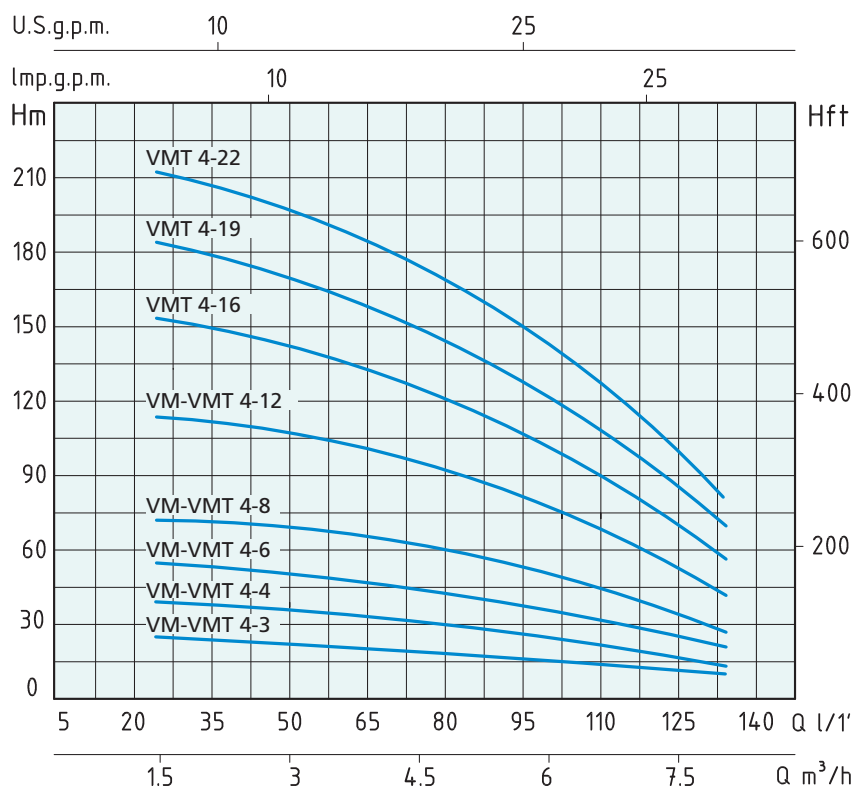

| TIPO<br>TYPE             |                        | POTENZA<br>NOMINALE<br>NOMINAL<br>POWER |      | AMPERE                   |                        | Q = PORTATA - CAPACITY                                              |     |       |       |      |      |       |     |      |      |     |
|--------------------------|------------------------|-----------------------------------------|------|--------------------------|------------------------|---------------------------------------------------------------------|-----|-------|-------|------|------|-------|-----|------|------|-----|
| Monofase<br>Single-phase | Trifase<br>Three-phase | P2                                      |      | Monofase<br>Single-phase | Trifase<br>Three-phase | m³/h<br>lt/1'                                                       | 1,5 | 2     | 2,4   | 3    | 3,5  | 4     | 5   | 6    | 7    | 8   |
|                          |                        | HP                                      | kW   |                          |                        |                                                                     | 25  | 33    | 40    | 50   | 58   | 66    | 83  | 100  | 116  | 133 |
| 230V-50Hz                | 230/400V-50Hz          |                                         |      | 1 x 230V                 | 3 x 400V               | Prevalenza manometrica totale in m.C.A. - Total head in meters w.c. |     |       |       |      |      |       |     |      |      |     |
| VM 4-3                   | VMT 4-3                | 0,75                                    | 0,55 | 3,4                      | 1,4                    | H<br>(m)                                                            | 28  | 27    | 26,5  | 25,5 | 24,5 | 23,5  | 21  | 18   | 14   | 10  |
| VM 4-4                   | VMT 4-4                | 1                                       | 0,75 | 5                        | 1,7                    |                                                                     | 38  | 36    | 35,5  | 34,5 | 33,5 | 32    | 29  | 24,5 | 19   | 13  |
| VM 4-6                   | VMT 4-6                | 1,5                                     | 1,1  | 6,9                      | 2,5                    |                                                                     | 56  | 54,5  | 53,5  | 52   | 50   | 48    | 42  | 36   | 28,5 | 20  |
| VM 4-8                   | VMT 4-8                | 2                                       | 1,5  | 9,7                      | 3,5                    |                                                                     | 74  | 73    | 72    | 70   | 68   | 66    | 60  | 52   | 42   | 27  |
| VM 4-12                  | VMT 4-12               | 3                                       | 2,2  | 13,5                     | 4,7                    |                                                                     | 114 | 110   | 107,5 | 104  | 101  | 96    | 87  | 74   | 59   | 41  |
|                          | VMT 4-16               | 4                                       | 3    |                          | 6,1                    |                                                                     | 152 | 149,5 | 146,5 | 142  | 137  | 131,5 | 118 | 101  | 80   | 55  |
|                          | VMT 4-19               | 5,5                                     | 4    |                          | 8                      |                                                                     | 183 | 179   | 175   | 168  | 163  | 158   | 143 | 124  | 100  | 67  |
|                          | VMT 4-22               | 5,5                                     | 4    |                          | 8                      |                                                                     | 211 | 205   | 200   | 194  | 188  | 181   | 164 | 142  | 116  | 79  |