


JV

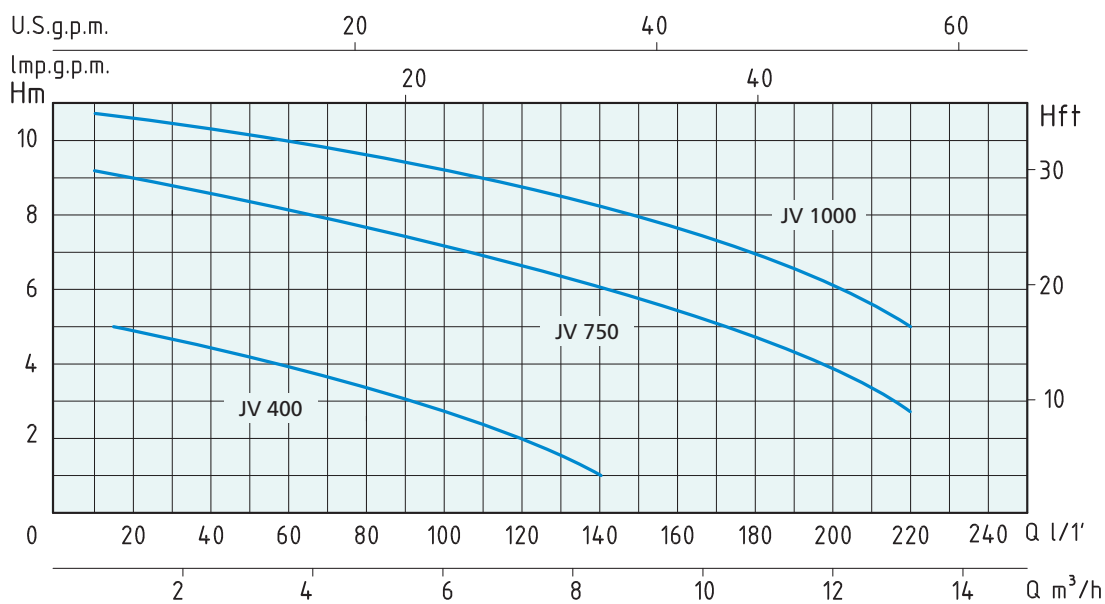

TIPO TYPE	POTENZA ASSORBITA INPUT POWER	AMPERE	Q = PORTATA - CAPACITY										
			m³/h	0	1,5	3	4,5	6	7,8	9	10,8	12	13,8
Monofase Single-phase	P1 Watt	Monofase Single-phase	lt/1'	0	25	50	75	100	130	150	180	200	230
230V-50Hz		1 x 230V	Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.										
JV 400	400 W	2,0	H (m)	5	4,5	4	3,5	2,5	1				
JV 750	750 W	3,5		9,2	8,8	8,2	8	7	6,5	6	4	3	2
JV 1000	1000 W	4,8		11	11,2	10	9	8	7,5	7	6	5	4