


# C



C 300-400-550



C 100

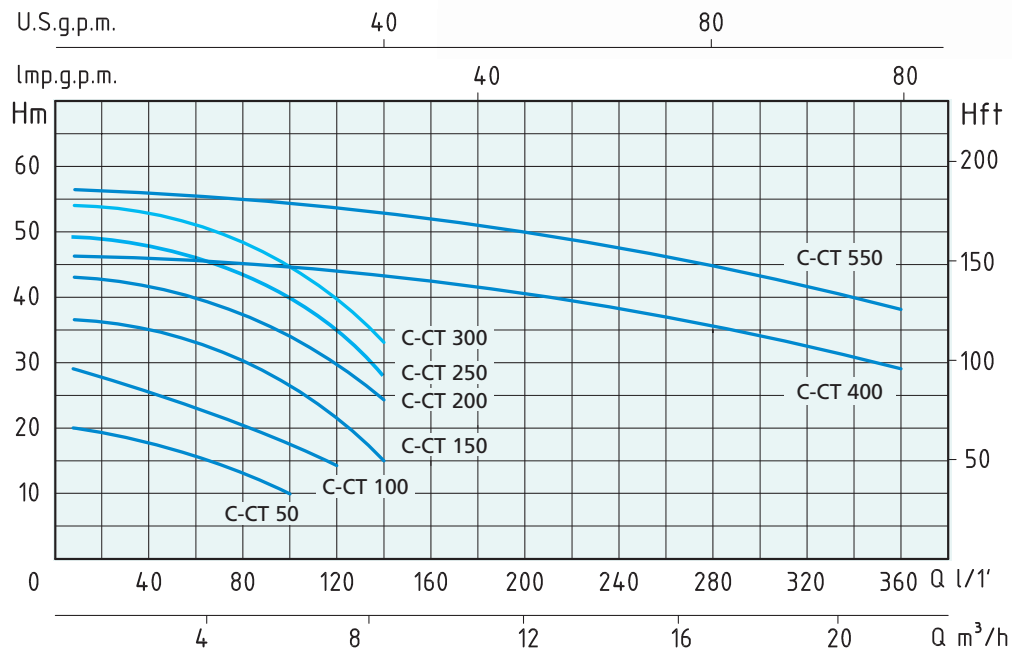

TIPO TYPE		POTENZA NOMINALE NOMINAL POWER		POTENZA ASSORBITA INPUT POWER	AMPERE		Q = PORTATA - CAPACITY										
Monofase Single-phase	Trifase Three-phase	P2		P1	Monofase Single-phase	Trifase Three-phase	Prevalenza manometrica totale in m.C.A. - Total head in meters w.c.										
		HP	kW	kW			m³/h	0,6	1,2	3,6	5,4	6	7,5	9	12	18	21
230V-50Hz	230/400V-50Hz				1 x 230V	3 x 400V	lt/1'	10	20	60	90	100	125	150	200	300	350
C 50	C 50 T	0,5	0,37	0,6	2,8	1,3	H	20	18	16	12	10					
C 100	C 100 T	1	0,75	1,2	5,5	2,3		29	28	23	20	18	14				
C 150	C 150 T	1,5	1,1	1,85	8,3	4		36	35,5	33,5	28	26	19				
C 200	C 200 T	2	1,5	2,4	10,7	5		43	42	40,5	36,5	34	28				
C 250	C 250 T	2,5	1,85	3,1	14	5,2		49,5	48,5	46,5	45	43	36	27			
C 300	C 300 T	3	2,2	3,3	15	5,5		54	53	51	47	45	38	29			
C 400	C 400 T	4	3	4,5	20	7,3		46,5	46	45,3	44,7	44,5	44	43,5	42	35	
C 550	C 550 T	5,5	4	5,7	28	9		56	55,5	54,5	54	53,5	53	52	50	44	39